


Cheque Personalization Encoder / Printer

BP63S

Tape

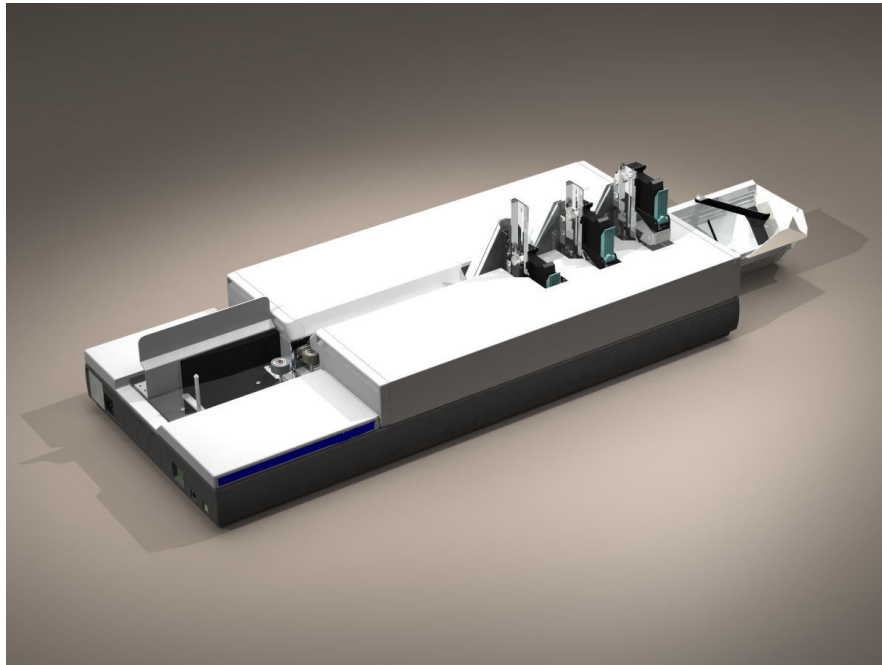

On – Demand Cheque Book Production The unique solution

New BP63S Cheque and Document printer encode and print Cheques and Giro.
BP63S is a perfect printer for Banks, Financial Institutions, Security Management, wherever high quality and security printing is required.
For the purpose of security only Impact MICR printing is used.
BP63S takes maximum advantages of the available technology providing a powerful production environment for pre-encoding and personalisation of cheques or value documents.

ADVANTAGES:

Easy to maintain and service
Low noise
Flash Programmable
Label dispenser
Staple up to 50 cheques + cover

Cheque Printing Software included.
Security with passwords
Unlimited queue list, with VIP transfer
2 document types

Software options:
5, 10 or 20 document types
Full report system (Audit Trail)
Backup feature
Connection of 2 units

BP63S

| Specifications | | |
|------------------------------------|------------------------------|---|
| Model | DR85U | OICR & Personalization encoder with Inkjet printer |
| Document Feeder | Type | Auto Feeder |
| | Capacity | 700 documents (with 0.116 mm document) |
| MICR Encoder | Font | E13B or CMC7 (factory option) |
| | Encoding fields | All fields (Max 65 columns) |
| | MICR ribbon type | Cassette one-time ribbon (65,000 characters/cassette) |
| Inkjet Printer (Manual adjustment) | Number of printing character | Total 622 characters (322 characters/line x 4 lines) |
| | Printing character font | Numeric, Alphabet capital, Symbol Rt k p v 372J , 3922Y ' f q v d k o cr ' l o ci g |
| | Vertical printing position | 39 - 339 mm from bottom q h f q e ' O cp w c l c f l w u r g f |
| | J q t k q p x n | 5/4: 2 o o ' h t q o ' t k i j v ' g f i g ' q ' r g u v ' q h ' f q e w o g p v 0 |
| Output Stacker | Capacity | 700 documents (with 0.116 mm document) |
| Stapler | 5000 staple | "YES |
| Label dispenser | 250 label's | "YES |
| Document Specification | Length | 152-2: 0 mm |
| | Height | 85-110 mm |
| | Thickness | 0.096-0.116 mm |
| Processing speed | | 30 documents/min (encoding 30 MICR characters + personalisation data with inkjet printing) |
| Dimension | BP63S | 3342Y , 632F , 462J o o |
| Weight | | 4: kg |
| Power Supply | | 100-240V(10%), 50/60Hz, 110VA |
| Communication Interface | | USB1 |

Arctic Heating AS
Smidsrødveien 95, Box 164 Teie
N-3106 Tønsberg - NORWAY

Telephone +47 33 30 42 20
Fax +47 33 32 29 02
Electronic mail: arctic@heating.no
Homepage: www.arctic-heating.com